

CS 50T

CS 60T

CS 80T





Manual utilizare


Model: CS 50T

Difuzoare de plafon



WORK PRO **CA**

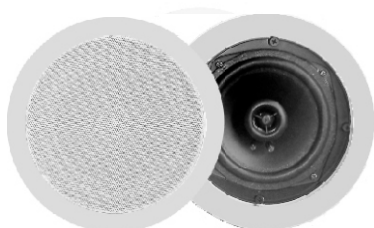

Dimensiuni

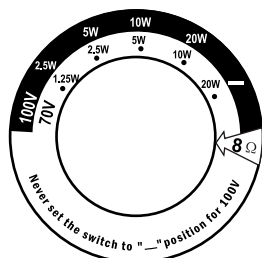

Selector iesiri

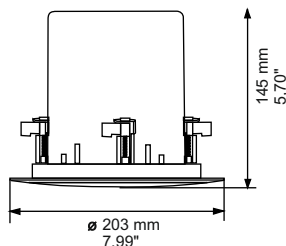



Trepte putere (70w)	1,25W(3k9Ω)/2,5W(1k9Ω)/5W(980Ω) 10W(490Ω)/20W(245Ω)
Trepte putere (100w)	2.5W(4kΩ)/5W(2kΩ)/10W(1kΩ)/20W(500Ω)
Pozitie impedanta minima.....	8Ω
Sensibilitate (1W/1m)	88 dB
Frecventa raspuns	100Hz - 20kHz
Dimensiuni	Ø 203 x 145 mm (Ø 8" x 5,70")
Gaura montare.....	Ø 170 mm (Ø 6,69")
Material (front baffle)	ABS
Material (grille)	Iron
Greutate.....	1,8 Kg




Model: CS 60T

Difuzoare de plafon

WORK PRO **CA**

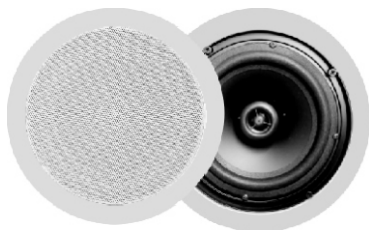

Dimensiuni

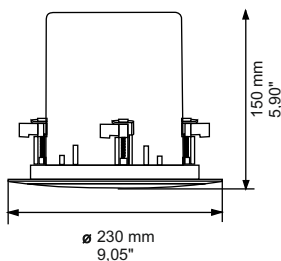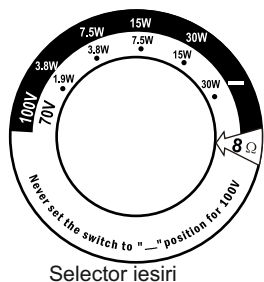

Trepte putere (70w)	1,9W(2k5Ω)/3,8W(1k3Ω)/7,5W(653Ω)
Trepte putere (100w)	15W(326Ω)/30W(163Ω)
Pozitie impedanta minima.....	8Ω
Sensibilitate (1W/1m)	88 dB
Frecventa raspuns	90Hz - 20kHz
Dimensiuni	Ø 230 x 150 mm (Ø 9,05" x 5,9")
Gaura montare.....	Ø 200 mm (Ø 7,87")
Material (front baffle)	ABS
Material (grille)	Iron
Greutate.....	2,3 Kg


Model: **CS 80T**

WORK PRO **CA**



Difuzoare de plafon



Dimensiuni

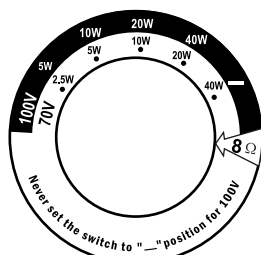

Selector iesiri

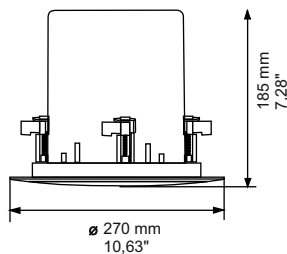

Trepte putere (70w)	2,5W(1k9Ω)/5W(980Ω)/10W(490Ω) 20W(245Ω)/40W(122Ω)
Trepte putere (100w)	5W(2kΩ)/10W(1kΩ)/20W(500Ω)/40W(250Ω)
Pozitie impedanta minima.....	8Ω
Sensibilitate (1W/1m)	88 dB
Frecventa raspuns	50Hz - 20kHz
Dimensiuni	Ø 270 x 185 mm (Ø 10,63" x 7,28")
Gaura montare.....	Ø 240 mm (Ø 9,44")
Material (front baffle)	ABS
Material (grille)	Iron
Greutate.....	3,1 Kg