

17.3inch Motorized & Manual Flip Down Monitor with MP5 Player



OPERATING INSTRUCTIONS

Content

Motorized Flip Down Monitor

Appearance and function ----- 1

Specifications----- 2

Wiring Diagram ----- 2

Manual Flip Down Monitor

Appearance and function ----- 3

Specifications----- 4

Wiring Diagram ----- 4

Installation ----- 5

Appearance and function

- ①. Up
- ②. Power button
- ③. Down




- | | |
|----------------|-----------|
| ① Power on/off | ② Mute |
| ③ Flip up | ④ Mode |
| ⑤ Flip down | ⑥ Up |
| ⑦ OK | ⑧ Left |
| ⑨ Right | ⑩ Down |
| ⑪ Setup | ⑫ Exit |
| ⑬ Play pause | ⑭ Volume- |
| ⑮ Volume+ | |

Specifications

Motorized Flip Down Monitor with MP5 Player

- Size of screen: 17.3inch
- Resolution: 1920(W)×3(RGB)×1080(H)
- System:PAL
- Display Mode:16:9/4:3
- With FM Transmitter function
- Built-in USB/HDMI function
- 1 Way video input
- 1 way audio output
- Full function with remote control
- Power supply: DC12V
- Built-in 16 colorful atmosphere light

Wiring Diagram

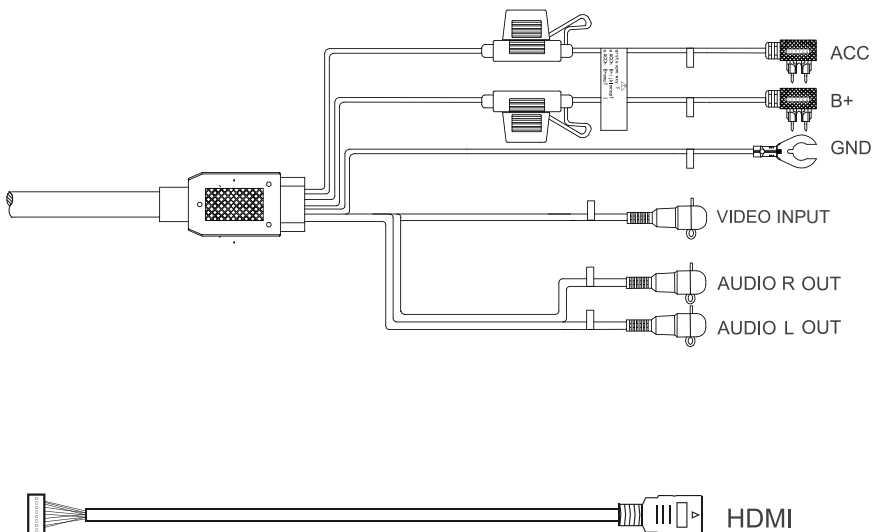

Appearance and function

- ①. Return
- ②. Open
- ③. Atmosphere light




① ② ③

② **Signal Source Switching**
Click this key to switch the signal source

④ **Direction Key**
Select the up, down, left and right in the menu

⑩ **Menu Key**
Click this key to display the menu

⑪ **Exit Key**
Click this key to exit back to the previous page

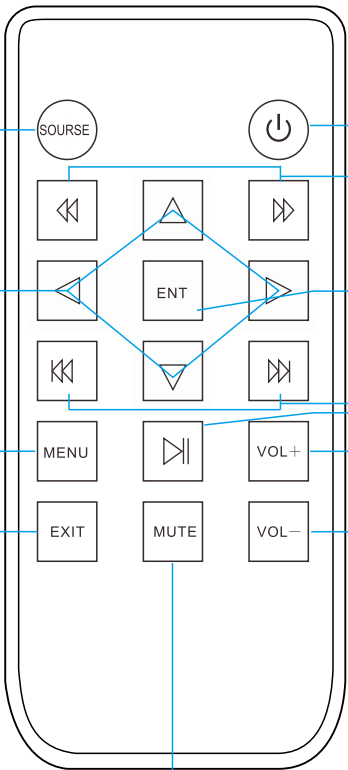

① **Power Key**
Power startup and shutdown

③ **Fast forward and backward keys**
This key is clicked once to adjust the speed of fast forward or backward for one time, followed by 2 times, 4 times, 8 times and 16 times, and then clicked once again to recover to normal.

⑤ **Enter Key**
Confirm the selected

⑥ **The previous and next song keys**

⑦ **Play/stop key**

⑧ **Volume + / Volume -**


⑨ **Mute key**
Press this key to mute or recover

Specifications

Manual Flip Down Monitor with MP5 Player

- Size of screen: 17.3inch
- Resolution: 1920(W)×3(RGB)×1080(H)
- System:PAL
- Display Mode:16:9/4:3
- With FM Transmitter function
- Built-in USB/HDMI function
- 1 Way video input
- 1 way audio output
- Full function with remote control
- Power supply: DC12V
- Built-in 16 colorful atmosphere light

Wiring Diagram

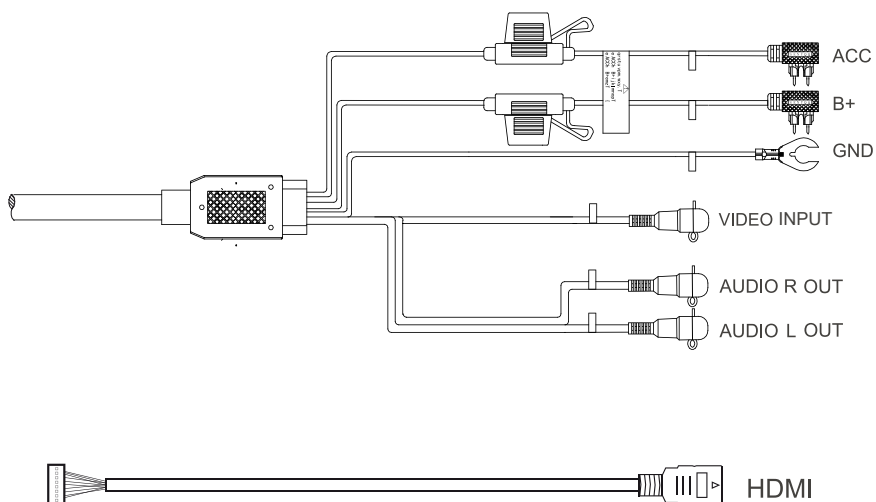

Installation

- 1.Take off the 4 screws,then remove the metal support bracket from the unit .As shown in the first illustration.
- 2.Tighten the metal support bracket to the ceiling of vehicle as shown in the second illustration,and leave a certain space to let the connecting wire pass though.(Take extra care to unbroken the ceiling of vehicle).
- 3.To install the unit to the metal support bracket,connecting with the unit and the wires passing through the remain space.

